

INSTALLATION INSTRUCTIONS

Step 1. Check Package Contents


Missing part? Call 1-800-653-2330

Mounting hardware kit includes the following:

Part	Quantity
a. Mounting Brackets ('L' brackets)	2 (up to 36" wide)
	3 (up to 64" wide)
	4 (up to 92" wide)
	5 (up to 120" wide)
	6 (up to 148" wide)
	7 (up to 180" wide)
	b. 1-1/2" Screws
c. 3/4" Screws	2 per bracket

Note: one extra screw of each noted size is included for convenience

Step 2. Tools required

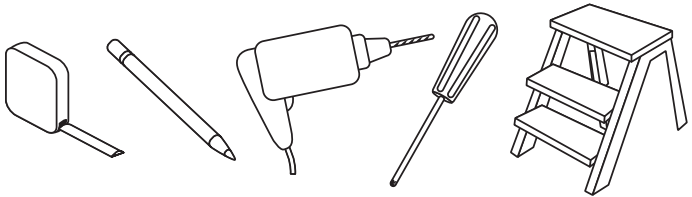

Pencil, tape measure, level, drill & bits, screw driver, step stool.

Drill Bits: for screws, use a 3/32" drill bit - for wall anchors (not included) follow the directions on the package.

Step 3. Bracket Location and Installation


Following the directions below you will be mounting the brackets to the wall first, and then placing the Valance or Cornice on top of the brackets in order to attach them to the board. It is desirable to attach the brackets to a wall stud or header board if possible.

For Wallboard or Plaster: use anchors specifically designed for hollow walls (not included).

For Concrete, Stone, Brick: use a masonry drill bit and anchors or screws specifically designed for masonry (not included).

Bracket Placement:

One bracket should be positioned about 6" from each end of the board. For wider shades that require up to 7 brackets, these should be spaced evenly between the two outermost brackets.

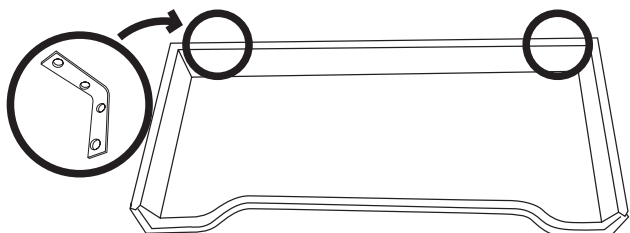


Precise bracket spacing is not critical (attach as many brackets as possible to wall studs, regardless of spacing).

The brackets must be level – use a Spirit Level if necessary to assure proper alignment. Mark the screw-hole locations for each bracket with a pencil. Pre-drill the screw holes using a 3/32" drill bit, and then attach the brackets using the 1-1/2" screws.

Attach the brackets and/or other mounting hardware for any undertreatments before attaching the Valance or Cornice.

Place the Valance or Cornice on top of the brackets. Adjust the board so that it is centered over the window opening. Then mark the locations of the screw holes using a marker or pen. Before drilling the screw holes, make a pin hole in the fabric at the marked locations using a thumb tack or nail. Pre-drill the screw holes using a 3/32" drill bit, and then attach the brackets using the 3/4" screws.

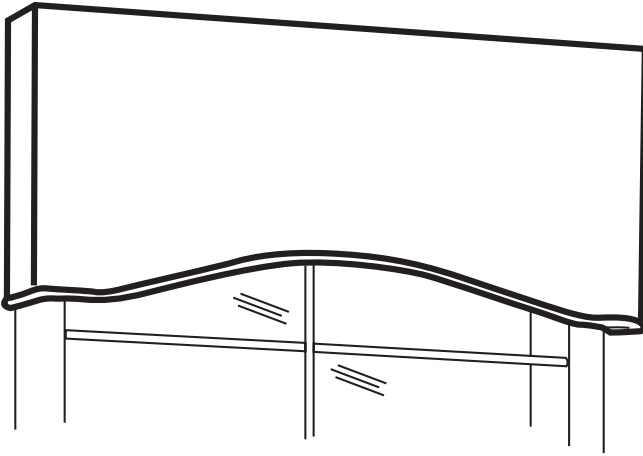

Care Instructions

The packaging and shipping of soft treatments frequently results in minor wrinkling of the fabrics used.

There are different characteristics and handling needs for the variety of fabrics offered in this program.

Please refer to the descriptions below for guidance on how to remedy minor wrinkles upon delivery.

First, allow all items to hang for a few days so wrinkles relax and begin to fall out.

Silk fabrics:

- Natural irregularities that give the fabric its unique and desired character. The appearance of slubs, nubs, loops and barre ridges are universally accepted as normal and should not be considered defects.
- Silk should be lined with Thermal Sateen or Blockout lining to avoid colorfading.
- If necessary, steam silk to remove stubborn wrinkles. Please note

that a good quality steamer is needed so water spots won't form from water spitting out from the steaming device.

Rayon/Poly blends:

- If necessary, steam rayon/poly blends to remove stubborn wrinkles. Please note that a good quality steamer is needed so water spots won't form from water spitting out from the steaming device.

100% Polyester:

- If necessary, steam polyester or gently iron on a low heat setting to remove stubborn wrinkles. 100% Polyester fabrics will release wrinkles easily by steaming or ironing on the Polyester / Synthetic Fabrics setting (Low), but may melt if the iron is too hot.

Cotton/Poly blends:

- If necessary, gently iron on a Blended Fabric (Medium) heat setting to remove stubborn wrinkles.

100% Cotton and 100% Linen:

- If necessary, gently iron on a Cotton (High) heat setting to remove stubborn wrinkles.

General Cleaning Guidance:

- Dry Cleaning is the best method to clean soiled soft window treatments.
- However on 100% Polyester, Cotton/Poly blends, 100% Cotton and 100% Linen you may: Spot clean with warm soapy water using mild detergent and a clean sponge. Air dry, and then steam or iron as guided above.