

SelectBlinds™


Roller Shades Installation Instructions



Pencil




Tape Measure



Screw Driver



Wall Level



Drill

Step#1

Before Installation:


Ensure that all components are accounted for by checking the packaging and the hardware content list. Do not attempt to assemble or install the product if any parts are missing or damaged. If you find any discrepancies, please contact us to request a replacement shade or any missing parts.

Installation Parts

Valance



Roller Shade



Hardware Box




Handle (x1)



1.25in Screw (x4+)



Inner Bracket Cover (x2)



Mounting Brackets (x2+)




Valance Clips (x2+)




Slide Piece (x2+)

Step#2

Install the Mounting Brackets:

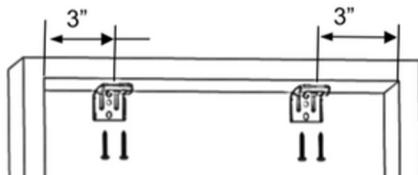

Inside Mount:
Positioned 3 inches from the window frame.

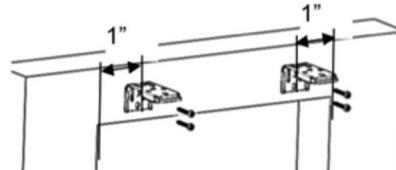

Outside Mount:
Positioned 1 inch from the window frame.

NOTE: Ensure that all mounting brackets are properly aligned and level with one another. For shades measuring over 48 inches in width three mounting brackets will be provided. Please ensure that the installation brackets are evenly spaced.

Contact Information: SelectBlinds


If you have any questions, please call us at (888) 257-1840.

For additional details and installation guidance, including videos, visit our website at www.selectblinds.com.

SelectBlinds™

Roller Shades Installation Instructions

To install the headrail, push it against the clear tab on the mounting bracket and twist upward until it clicks securely into place. Please refer to the illustration below for guidance.

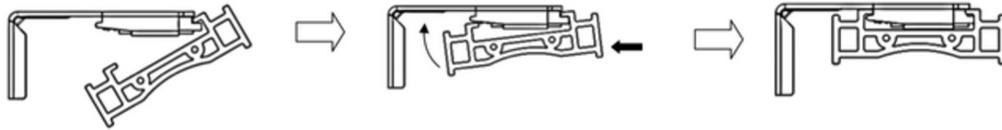

Note: Your shade will be ready for immediate use upon unboxing. Over time, you may need to make tension adjustments. The shade is equipped with a **calibration knob** located on the left inner bracket. While raising the shade, if it does not ascend simultaneously with your hand, turn the **calibration knob** downward to increase the tension in the mechanism.


**Turn Upwards
(to reduce tension)**

**Turn Downwards
(to increase tension)**




Step#3


Install the valance, slide piece, and handle.



Rotate the slide piece 90 degrees




Install the slide piece

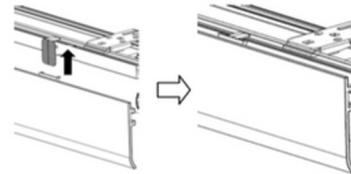


Slide the valance into the valance clip

Make necessary adjustments to fit

Snap on Handle to bottom of shade

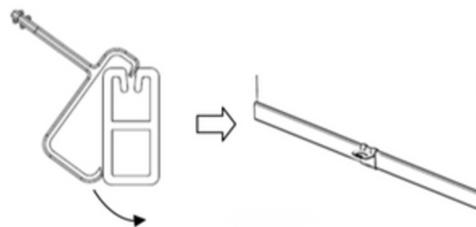

For an outside mount, please attach the cover to the inner brackets like shown below.

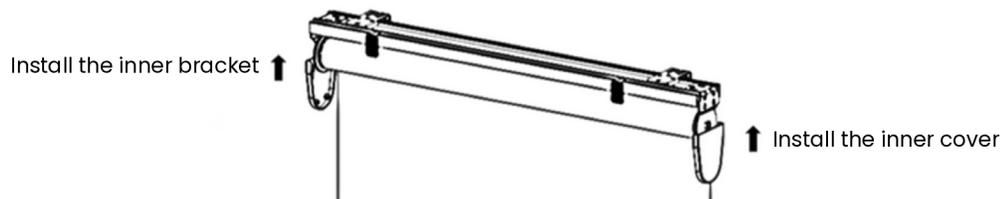

Contact Information: SelectBlinds™

If you have any questions, please call us at (888) 257-1840.

For additional details and installation guidance, including videos, visit our website at www.selectblinds.com.

SelectBlinds™

FABRIC CARE GUIDELINES



When buying roller shades, consider their clean, modern look and functionality.

Benefits include:

- Precise light control (light-filtering to blackout)
- Improved energy efficiency, lowering utility bills
- High levels of privacy
- Minimalist design suitable for small spaces



How to Care for Your Roller Shades

Regular cleaning is essential for preserving the aesthetic appeal of your roller shades. Below are the recommended care practices to ensure their longevity.

- Routine Maintenance: dust with a feather duster or microfiber cloth each week.
- Vacuum monthly with a low-suction vacuum and soft brush attachment to remove debris. Support the fabric from behind while cleaning.
- Spot Cleaning: Combine a mild detergent with warm water and dampen a cloth—ensure it is not soaked. Gently blot the stains instead of rubbing to prevent pilling.
- Avoid: Harsh chemicals, abrasive cleaner.

Roller shade fabrics are sophisticated textiles that have been carefully engineered. However, like all fabrics, they may exhibit minor variations that are considered normal and not classified as defects. Such variations, which are not covered by the warranty, can result from factors like shipping, insulation, or regular use.

Impressions commonly occur during shipping or from prolonged storage when the fabric is rolled up on the tube. If the fabric remains in contact with a rigid object, that object may leave an impression on the fabric.

The simplest method to remove these impressions is to hang the shades in a downward position. When exposed to sunlight, the fibers will gradually relax, causing the impressions to fade. If the shade is situated in an area without direct sunlight, allow it to hang in the closed position for 48 hours. Should the impressions persist, they can often be coaxed away with the use of a hairdryer.

***Note:** Avoid using a heat gun. Heat guns can reach extremely high temperatures and may cause permanent damage to the roller shade.**

Here are some tips for effective troubleshooting:

Shades don't go up simultaneously with your hand	Turn the calibrations Knob downward to give more tensions to the mechanism
Shades will creep down and up	Turn the calibrations Knob downward to give more tensions to the mechanism
shades bounce back	Turn the calibrations Knob downward to give more tensions to the mechanism
Impress marks on Blackout fabrics	Hang the shades freely for 48 hours at room temperature to have the fabric fully relaxes

Contact Information: SelectBlinds

If you have any questions, please call us at (888) 257-1840.

For additional details and installation guidance, including videos, visit our website at www.selectblinds.com.